


**FILTRI MAGNETICI
PERMANENTI**

**PERMANENT MAGNETIC
FILTERS**

I filtri a magneti permanenti "FMP" vengono impiegati per la deferrizzazione di smalti e barbotine con possibilita' di installazione sullo scarico dei vibrosetacci o direttamente sulle linee di smaltatura. Il facile montaggio garantisce una rapida pulizia delle griglie da effettuarsi a mezzo del soffiaggio di aria compressa.

The permanent magnetic filters "FMP" are used for de-ironizing of enamels and slips with the possibility of installation of vibroscreener on the outlet or directly on the enamellig lines. The installation is easy and guarantees quick cleaning of the grids to carried out by blowing compressed air.

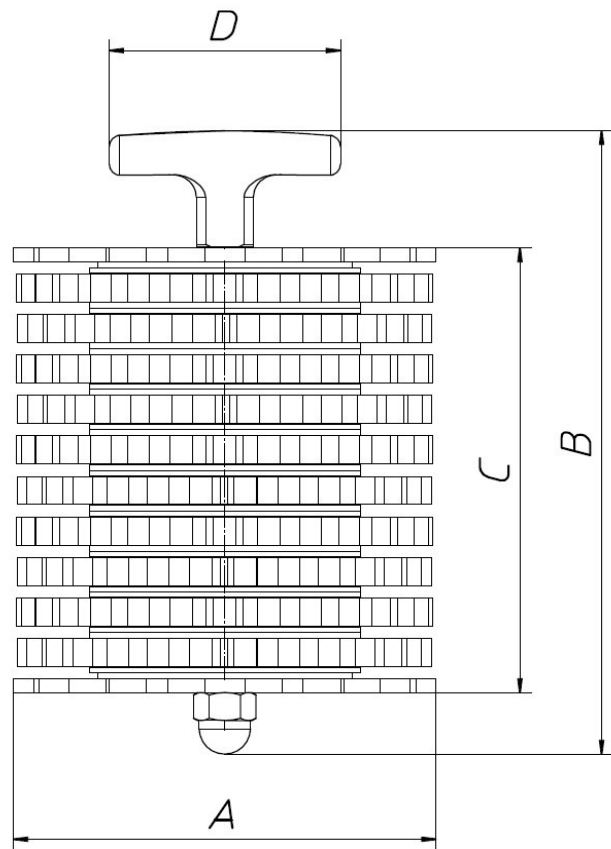

CARATTERISTICHE DIMENSIONALI / DIMENSIONAL CHARACTERISTICS

Tipo Type	Portata Capacity m ³ /h	Griglie Grids			Dimensioni / Dimensions mm				Peso Weight Kg
		Øi	Øe	n°	A	B	C	D	
FMP10	2.2	65	100	10	102	200	150	70	3
FMP10ND	2.2	65	100	10	102	200	150	70	3.5
FMP15	5.5	90	145	10	148	225	160	80	6.5
FMP15ND	5.5	90	145	10	148	225	160	80	8



Magnetica Torri S.r.l. - www.magneticatorri.it